


VERTICAL CURB

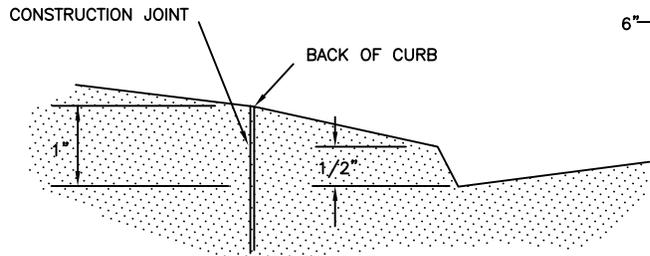


DETAIL

"X" LENGTH		
ROLL	6" CURB	8" CURB
6'	4'	6'

NOTE:

1. MIN. D/W SLAB THICKNESS IN SINGLE FAMILY RESIDENTIAL AREAS SHALL BE 4".
2. MIN. LENGTH OF RESIDENTIAL D/W SHALL BE 12' & MAX. LENGTH 24'.
3. ALL CONCRETE REMOVALS SHALL BE TO NEAT SAW CUT LINES.
4. 90% RELATIVE COMPACTION REQUIRED ON SUBGRADE.
5. DRIVEWAY APPROACH SHALL BE POURED SEPARATELY WITH CURB UNLESS OTHERWISE APPROVED BY THE ENGINEER.
6. ON SITE GRADING MAY BE REQUIRED TO ELIMINATE EXCESSIVE GRADE CHANGE AND TO MAINTAIN SUITABLE DRAINAGE.
7. MAXIMUM CURB OPENING MAY BE INCREASED DUE TO SPECIAL CONDITIONS ON APPROVAL OF THE CITY ENGINEER.

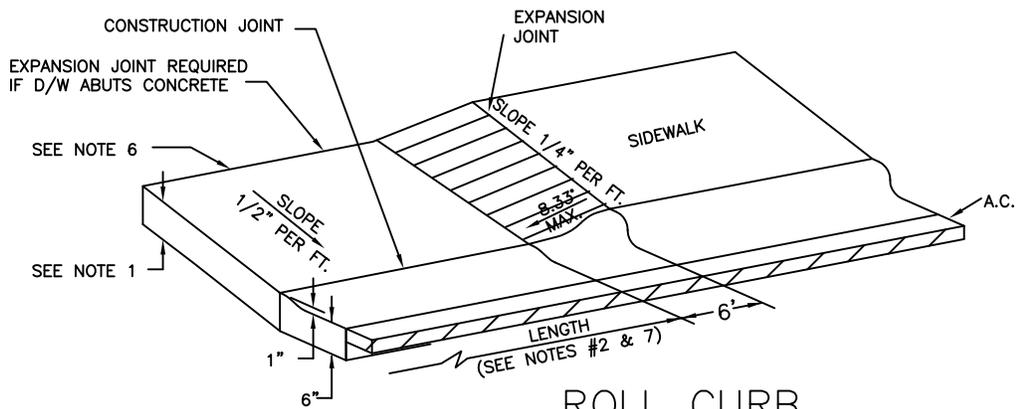

ROLL CURB

STANDARD DRIVEWAY
(FOR SINGLE FAMILY & DUPLEX ONLY)

05/03	UPDATE NOTES	DLS
DATE	REVISIONS	BY

CITY OF BIGGS	
STANDARD DETAIL	
205	
DAVID L. SWARTZ, P.E. APPROVED	1/97 DATE