



City of Biggs

Agenda Item Staff Report For the Regular City Council Meeting: February 13, 2018

TO: Honorable Mayor and Members of the City Council
FROM: City Administrator
SUBJECT: F Street Water Line Replacement


Background

Staff has identified an approximately 508' section of water main in need of replacement. The old 4" steel pipe is both undersized and (more importantly) deteriorated to the point of unreliability.

The recommendation is to accept the attached \$61,500 proposal. Or, alternatively to conduct a more formal RFP process and to award.

Recommendation: Authorize the City Administrator to contract for replacement of the F Street water main, not to exceed \$65,000. And to modify the FY 2017-2018 budget by increasing line item "Water Fund Contract work" and "Total Expenses" by \$65,000.

Mark Sorensen, City Administrator

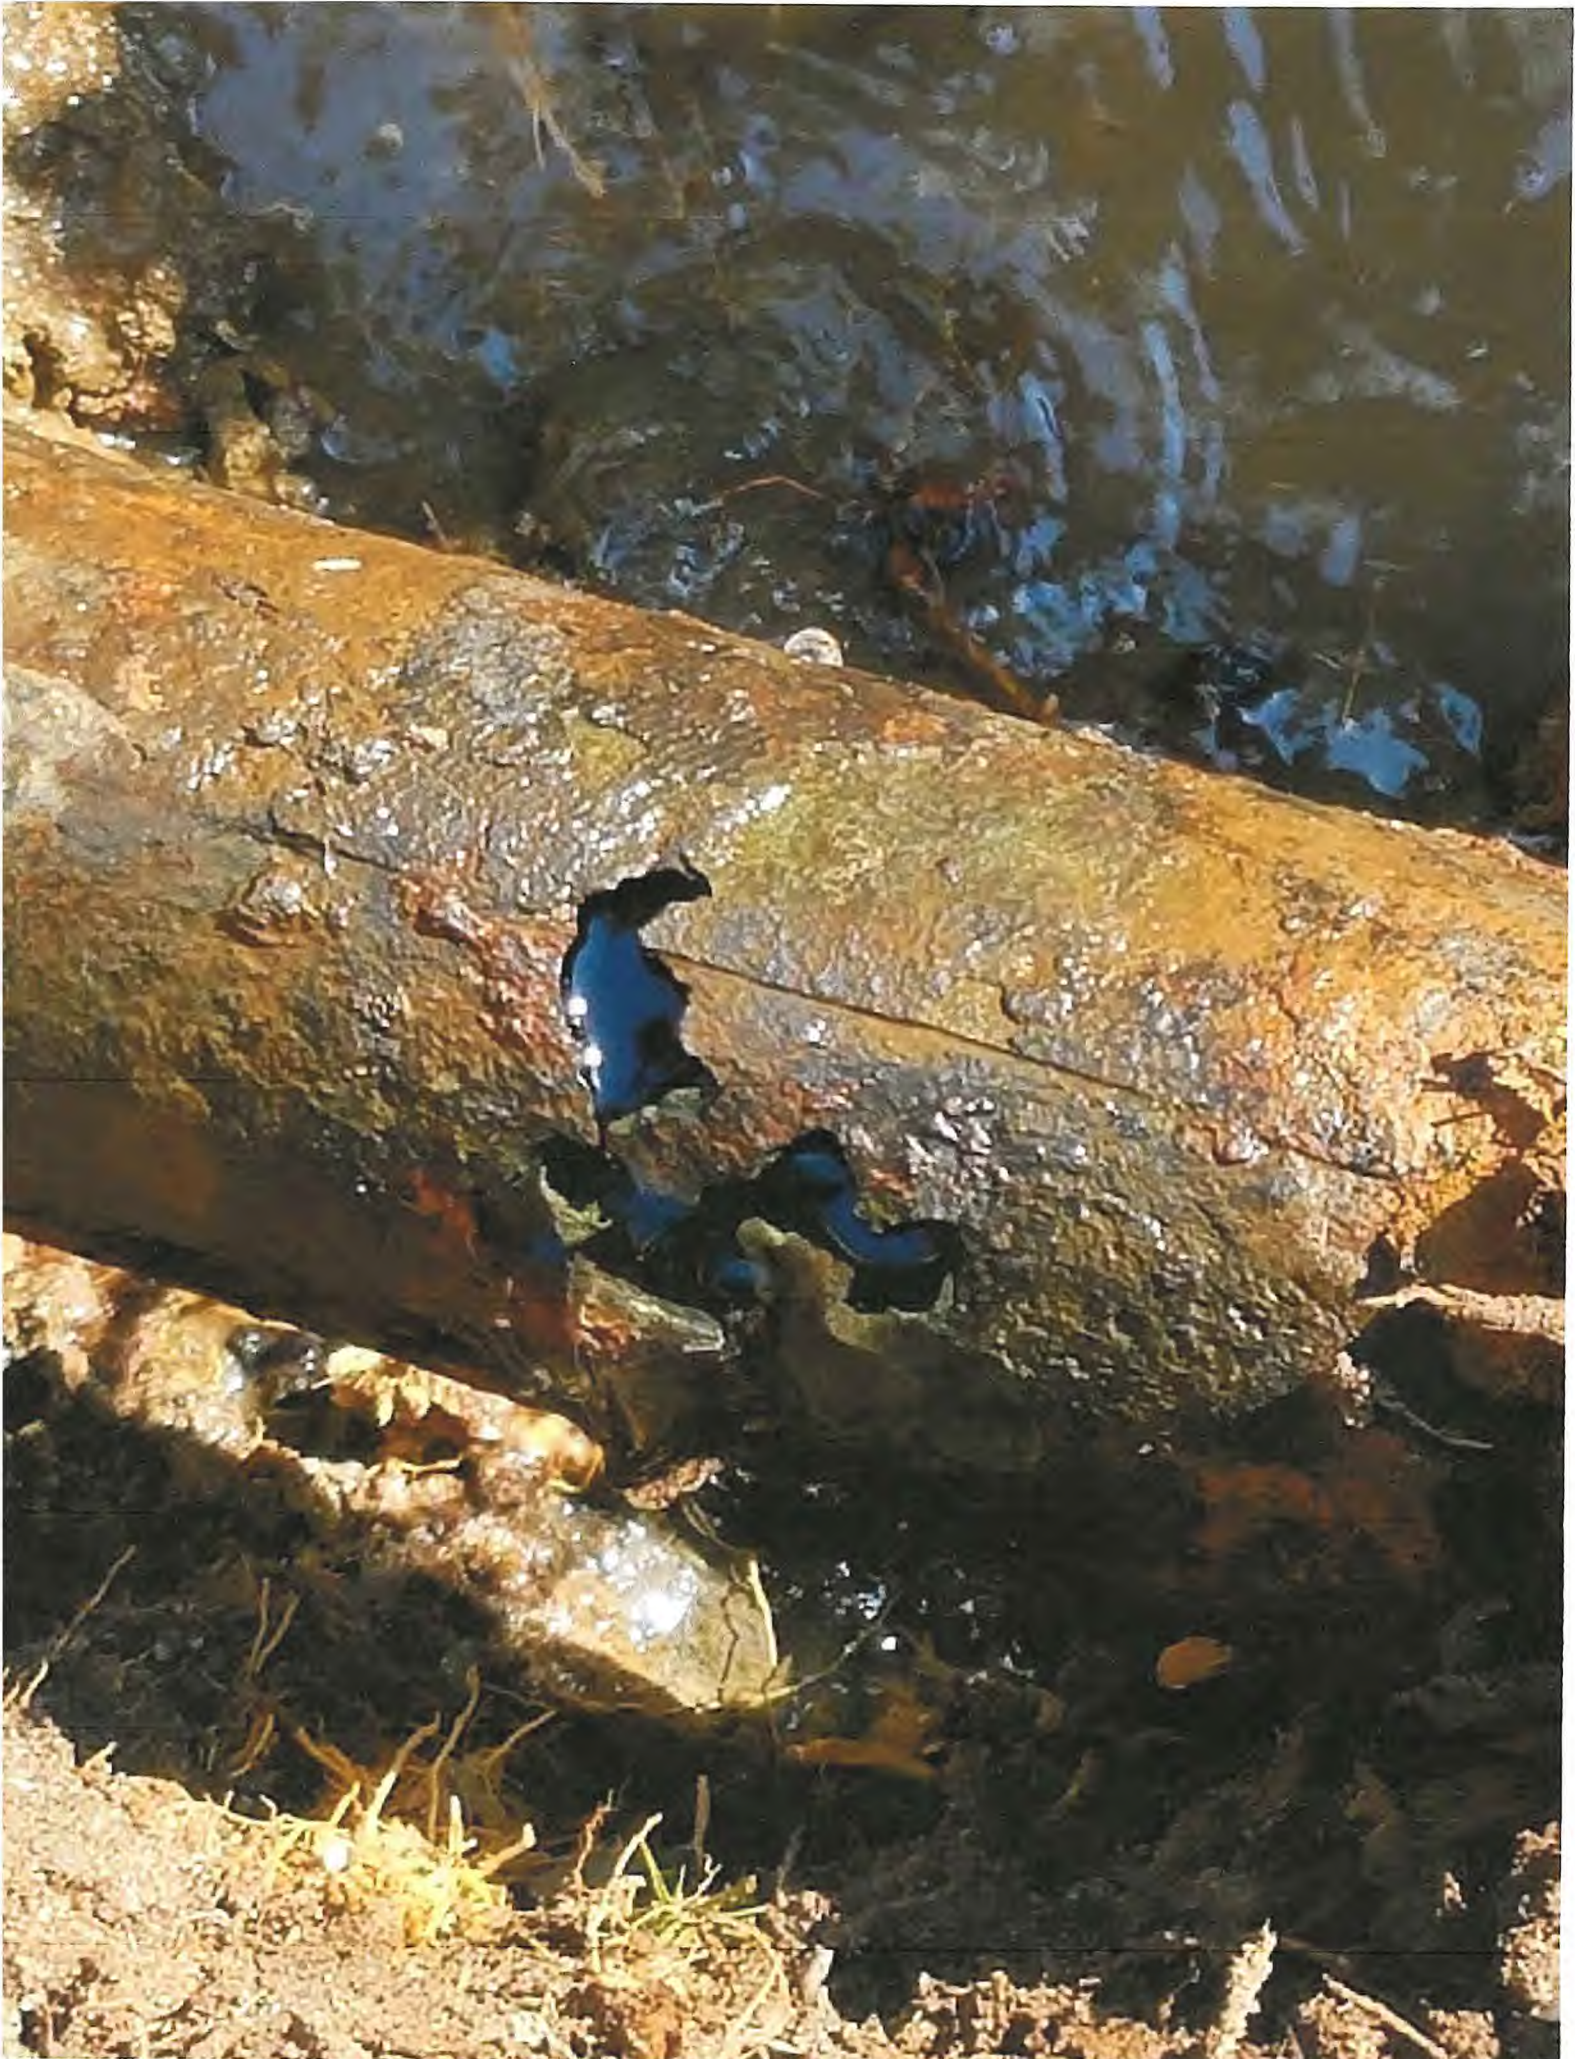

ESTIMATE



Date: 10/18/2017
 Invoice # 104883
 Expiration Date: 11/18/2017

Cost U Less
 Plumbing & Rooter INC.
 Ca #827835
 PO BOX 1005
 Gridley, CA 95948
 530-315-2966
 costulessplumbing@hotmail.com

TO Paul Pratt
 The City of Biggs
 PO BOX 307
 Biggs, CA 95917
 530-868-1396
 Paul@biggs-ca.gov

SALESPERSON	JOB	PAYMENT TERMS	DUE DATE
Joe	St., Biggs	As agreed	

QTY	DESCRIPTION	UNIT PRICE	LINE TOTAL
1.	Estimate to saw cut side of road 508' from main valve on 6 th St. To main valve on 7 th St down F St.		
2.	Dig and expose a 4" water main		
3.	Install new PVC 6" water main and new ends in valve		
4.	Backfill to city code		
5.	Replace asphalt		\$46,500.00
	*If needing to run service line to property line to new meter supplied by the city for 6 houses	\$3,500.00	\$3,500.00
	*All six lines done at one time (Quantity of 6)	\$2,500.00	\$15,000.00

SUBTOTAL \$50,000-
\$61,500.00

**Estimate may change due to any unforeseen circumstances X _____

SALES TAX

TOTAL

Quotation prepared by: _____

To accept this quotation, sign here and return: _____

Thank you for your business!

Proposal for:
City Of Biggs 6" Water Main
from

Duke Sherwood Contracting Inc.

495 Stimpson Rd, , Oroville, CA 95965

Phone: (530) 533-2710 Fax: (530) 846-6760

License: 327827 Type: A



Bid Date: 10/24/2017

Time: 3:00PM

Quote Number: 192-17

Biggs, City Of

Item	Description	Quantity	Unit	Unit Price	Total Price
01	Mobilization	1.00	LS	2,533.0000	2,533.00
02	Furnish And Install 6" C900	508.00	LF	70.0000	35,560.00
03	Water Service Tie In At New Main	6.00	EA	1,180.0000	7,080.00
04	R&R SW,Curb& Gutter	2.00	EA	1,066.0000	2,132.00
05	Trench Paving	1.00	LS	8,471.0000	8,471.00
06	ADD ALT Water Service Tie In At Property Line	6.00	EA	2,113.0000	12,678.00
				Total:	<u>68,454.00</u>

√ = Locked Bid-Item

! = Zero Total Price

Attachment Enclosed

Estimator: Doug Sherwood

Duke Sherwood Contracting Inc.
Job Conditions - Attachment 'A'

City Of Biggs 6" Water Main

Thank you for giving Duke Sherwood Contracting Inc. the opportunity to offer our services.

INCLUSIONS:

WATER: Furnish and install 508 lf of 6" C900 with 6 service laterals tying in at the new main line. Pothole existing utilities and test pipe line. Remove and replace concrete in two locations on the north side of the street for the service tie ins. Pave back trench with 3" of 1/2" ac.

ADD ALT: Install service laterals to the property line. Remove and replace concrete in three locations on the south side of the street and pave back the trench's with 3" of 1/2" ac.

EXCLUSIONS:

PREVAILING WAGE
SEAL COAT
STRIPPING & SIGNS
LANDSCAPING
SWPPP
PERMITS
FEES
ENGINEERING
SURVEYING
BONDS

ESCALATION CLAUSE: Oil surcharges for this quote are based on current rack prices for PG 64-10. An increase of \$0.60 per ton for every \$10.00 increase in liquid asphalt will be reflected in the price at the time of paving.

This proposal is valid for 30 days from the enclosed date.
Thank you,

Doug Sherwood
DIR#:1000007768

Proposal & Contract

FLETCHER'S PLUMBING & CONTRACTING, INC.
 219 Burns Dr, Yuba City 1905 Nord Ave, Chico
 530-673-2489 * 530-673-1317 fax 530-342-7800 * 530-342-7808 fax
 Contractors Lic. No 309313 A, B, C36



PROPOSAL SUBMITTED TO CITY OF BIGGS	PHONE 693-0568	DATE 10-23-17
Street 3016 SIXTH ST	Job Address F STREET	
City State Zip BIGGS, CA. 95917	City State Zip BIGGS, CA. 95917	
WATER MAIN ON F ST		JOB PHONE

Bid Consists of:

- 1 LAYOUT TRENCH PATH WITH CITY, USA WORK AREA, AND LOCATE SEWER LATERALS
- 2 SAW CUT ASPHALT WHERE NECESSARY FOR MAIN WATER LINE
- 3 REMOVE ASPHALT AND HAUL AWAY
- 4 TRENCH APPROX 3' DEEP FROM VALVE AT 6TH STREET TO VALVE AT 7TH STREET
- 5 INSTALL NEW 6" C900 PIPE FROM VALVE ON 6TH STREET TO VALVE AT 7TH STREET
- 6 CONNECT TO EXISTING 4" LINE AT 6TH STREET AND CAP END OF LINE AT 7TH STREET
- 7 POUR THRUST BLOCKS WHERE NECESSARY
- 8 INSTALL TRACER WIRE FROM VALVE TO VALVE
- 9 BED PIPE WITH SAND AND BACKFILL WITH CRUSHED ROCK
- 10 COMPACT TRENCH LINE AND PREP FOR ASPHALT
- 11 REPAIR ASPHALT IN TRENCH AREA ONLY
- 12 HAUL AWAY DIRT AND ASPHALT REMOVED FROM EXCAVATION
- 13 PRICE INCLUDES ALL LABOR, EQUIPMENT, MATERIALS AND IS NOT BASED ON PREVAILING WAGE RATES
- 14 PRICE DOES NOT INCLUDE REROUTES AROUND CONFLICTING UTILITIES
- 15 PRICE DOES NOT INCLUDE REMOVAL OF GROUND WATER (IF ENCOUNTERED, PRICE WILL BE GIVEN AT TIME)
- 16 CITY TO SHUT DOWN F ST FROM 6TH TO 7TH STREETS DURING WORK HOURS
- 17 PRICE DOES NOT INCLUDE PERMITS OR BONDING
- 18 PRICE IS BASED ON ONE MOBE AND ONE DEMOBE

WATER MAIN TOTAL: \$53, 450.00

CONTINUED NEXT PAGE -----

Contractors are required by law to be licensed and regulated by the Contractors' State License Board. Any questions concerning a contractor may be referred to the registrar of the board whose address is: Contractors' State License Board -1020 N St. - Sacramento, CA 95814

NOTICE: Under the Mechanic's Lien Law (California Code of Civil Procedure, Section 1181 of seq.) any contractor, subcontractor, laborer, supplier or other person who helps to improve your property but is not paid for his work or supplies, has the right to enforce a claim against your property. This means that after a court hearing, your property could be sold by a court officer and the proceeds of the sale used to satisfy the indebtedness. This can happen even if you have paid your own contractor in full, if the subcontractor, laborer, or supplier remains unpaid.

WE PROPOSE hereby to furnish material and labor - complete in accordance with above specifications, for the sum of:

_____ dollars _____

All material is guaranteed to be as specified. All work to be completed in a Substantial workmanlike manner according to specifications submitted, Per standard practices. Any alteration or deviation from above specifications Involving extra costs will be executed only upon written orders, and will become an extra charge over and above the estimate. All agreements contingent upon Strikes, accidents or delays beyond our control. Owner to carry fire, tornado and other necessary insurance. Our workers are fully covered by Workmen's Compensation Insurance.

Authorized Signature _____

Note: This proposal may be withdrawn by us if not accepted within **30** days.

ACCEPTANCE OF PROPOSAL The above prices, specifications and conditions are satisfactory and are hereby accepted. You are authorized to do the work as specified. Payment will be made as outline above.

Date of Acceptance: _____ Signature _____

Proposal & Contract

FLETCHER'S PLUMBING & CONTRACTING, INC.
 219 Burns Dr, Yuba City 1905 Nord Ave, Chico
 530-673-2489 * 530-673-1317 fax 530-342-7800 * 530-342-7808 fax
 Contractors Lic. No 309313 A, B, C36



PROPOSAL SUBMITTED TO	CITY OF BIGGS	PHONE	693-0568	DATE	10-23-17
Street	3016 SIXTH ST	Job Address	F STREET		
City State Zip	BIGGS, CA. 95917	City State Zip	BIGGS, CA. 95917		
WATER MAIN ON F ST				JOB PHONE	

Bid Consists of:

CONTINUED -----

- 1 SAW CUT FROM NEW WATER MAIN TO EXISTING SHUT OFF BEHIND SIDEWALK ON SIX HOUSES
- 2 TRENCH FROM MAIN TO EACH VALVE BEHIND SIDEWALK
- 3 INSTALL SADDLE, CORP STOP FOR EACH LATERAL
- 4 RUN NEW 3/4" HDPE FROM CORP STOP TO VALVE BEHIND SIDEWALK FOR EACH LATERAL
- 5 RUN TRACER WIRE FROM CORP STOP TO VALVE BEHIND SIDEWALK FOR EACH LATERAL
- 6 INSTALL CITY PROVIDED VALVE, METER AND BOX FOR EACH LATERAL
- 7 BED LINES WITH SAND AND BACKFILL WITH CRUSHED ROCK
- 8 COMPACT ALL TRENCHES
- 9 REPAIR ASPHALT IN TRENCH LINES ONLY
- 10 HAUL AWAY DIRT AND ASPHALT REMOVED FROM EXCAVATION
- 11 PRICE INCLUDES ALL LABOR, EQUIPMENT AND MATERIALS
- 12 PRICE IS NOT BASED ON CURRENT PREVAILING WAGE RATES
- 13 PRICE DOES NOT INCLUDE REROUTES AROUND CONFLICTING UTILITIES
- 14 PRICE DOES NOT INCLUDE REMOVAL OF GROUND WATER (IF ENCOUNTERED, PRICE WILL BE GIVEN AT TIME)
- 15 CITY TO SHUT DOWN F ST FROM 6TH TO 7TH STREETS DURING WORK HOURS
- 16 PRICE DOES NOT INCLUDE PERMITS OR BONDING
- 17 PRICE IS BASED ON DOING WORK AT SAME TIME AS WATER MAIN

6 WATER SERVICE LATERALS TOTAL: \$21,750.00

Contractors are required by law to be licensed and regulated by the Contractors' State License Board. Any questions concerning a contractor may be referred to the registrar of the board whose address is: Contractors' State License Board -1020 N St. - Sacramento, CA 95814

NOTICE: Under the Mechanic's Lien Law (California Code of Civil Procedure, Section 1181 of seq.) any contractor, subcontractor, laborer, supplier or other person who helps to improve your property but is not paid for his work or supplies, has the right to enforce a claim against your property. This means that after a court hearing, your property could be sold by a court officer and the proceeds of the sale used to satisfy the indebtedness. This can happen even if you have paid your own contractor in full, if the subcontractor, laborer, or supplier remains unpaid.

WE PROPOSE hereby to furnish material and labor - complete in accordance with above specifications, for the sum of:

SEVENTY FIVE THOUSAND TWO HUNDRED DOLLARS AND NO CENTS dollars \$75,200.00

UPON COMPLETION

All material is guaranteed to be as specified. All work to be completed in a Substantial workmanlike manner according to specifications submitted. Per standard practices. Any alteration or deviation from above specifications involving extra costs will be executed only upon written orders, and will become an extra charge over and above the estimate. All agreements contingent upon Strikes, accidents or delays beyond our control. Owner to carry fire, tornado and other necessary insurance. Our workers are fully covered by Workmen's Compensation Insurance.

Authorized Signature

Note: This proposal may be withdrawn by us if not accepted within 30 days.

ACCEPTANCE OF PROPOSAL The above prices, specifications and conditions are satisfactory and are hereby accepted. You are authorized to do the work as specified. Payment will be made as outline above.

Signature _____

Date of Acceptance: _____

Signature _____