




SECTION C-C:




SECTION A-A:

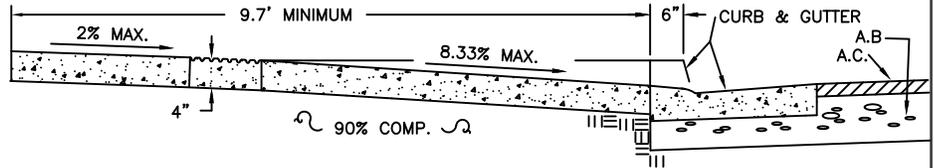

WHEELCHAIR RAMP FOR SIDEWALKS 5' AND LESS



SECTION B-B:

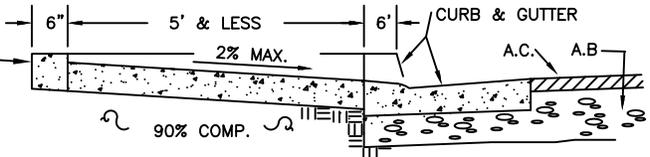

- NOTES:
1. THE RAMP SHALL HAVE A 12" WIDE BORDER W/1/4" GROOVES APPROX. 3/4" O.C. SEE GROOVE DETAIL. THE SURFACE OF THE RAMP SHALL HAVE A TRANSVERSE SURROUNDING SIDEWALK EXCEPT WHEN LOCATED IN THE CENTER OF THE CURB.
  2. RAMP THAT HAVE A SURFACE SLOPE BETWEEN 5.0% AND 6.67% SHALL HAVE A DETECTABLE WARNING SURFACE THAT EXTENDS THE FULL WIDTH AND DEPTH OF THE RAMP. THE DETECTABLE WARNING SURFACE SHALL CONSIST OF TRUNCATED DOMES (SEE TRUNCATED DOMES DETAILS).
  3. SEE CURRENT ADA STANDARDS FOR ADDITIONAL DETAILS.

WHEELCHAIR RAMP

DATE	REVISIONS	BY
12-9-05	UPDATE OF FEDERAL/STATE STANDARDS	A.V.
03-10-95	UPDATE OF FEDERAL/STATE STANDARDS	D.P.N
07-15-94	NEW ADA STANDARDS	D.L.S.

CITY OF BIGGS	
STANDARD DETAIL	
207	
DAVID L. SWARTZ, P.E.	1/97
APPROVED	DATE